arXiv:1212.0556v1 [quant-ph] 3 Dec 2012

Self-calibrating tomography for multi-dimensional systems

Nicolás Quesada, Agata M. Brańczyk and Daniel F. V. James
McLennan Physical Laboratories, University of Toronto,
60 St. George Street, Toronto, ON, M5S1A7, Canada. *

We present a formalism for self-calibrating tomography of arbitrary dimensional systems. Self-calibrating quantum state tomography was first introduced in the context of qubits, and allows the reconstruction of the density matrix of an unknown quantum state despite incomplete knowledge of the unitary operations used to change the measurement basis. We show how this can be generalized to qudits, *i.e.* d-level systems, and provide a specific example for a V-type three-level atomic system whose transition dipole moments are not known. We show that it is always possible to retrieve the unknown state and process parameters, except for a set of zero measure in the state-parameter space.

PACS numbers: 03.65.Wj

I. INTRODUCTION

The characterization of quantum states is a key step in quantum information processing and quantum computing [1]. Such characterization can be achieved by performing a variety of measurements on many identically-prepared copies of the state and using these results to reconstruct the quantum state. This process is known as *quantum state tomography* (QST) [2–4].

The various measurements are typically achieved by applying a unitary transformation to the quantum state before measurement in a convenient basis. This requires a well-characterized unitary operation, which is not always available. With such conditions in mind *self-calibrating tomography* (SCT) was introduced by Brańczyk *et al.* [5], which allows the reconstruction of a quantum state despite incomplete knowledge of the unitary operations used to change the measurement basis. SCT was used to successfully reconstruct the state of a polarization-encoded photonic qubit using a wave plate with unknown retardance. In this work we formalize the ideas presented in [5] and show how to generalize SCT to the case of multi-level systems.

The concept of performing tomography with unknown parameters in both the state, as well as the process, has also recently been investigated by Mogilevtsev *et al.* [6] and Merkel *et al.* [7].

II. TWO-LEVEL SYSTEM

In this section, we formalize the ideas of self-calibrating tomography (SCT) in the context of qubits. We explore several scenarios including the one originally discussed in [5] and we prove that such schemes will be able to reconstruct any possible state of a qubit system except for a set of zero measure. In this exception, a different scheme can be used.

A requirement of quantum state tomography is the ability to perform measurements in a variety of different bases. In many physical systems, there is a "preferred" basis in which a measurement can be made, e.g. the horizontal/vertical polarization basis in polarization-encoded single photons; or the ground/excited state basis for atomic systems. Other bases are typically accessed by performing unitary operations on the state before measurement, effectively changing the measurement basis.

Self-calibrating tomography considers the case where this unitary operation is not completely characterized, but controllable to some extent. It is "self-calibrating" in the sense that certain parameters of the unitary operation do not need to be calibrated in advance.

To demonstrate the concept, we begin by defining a general qubit density operator and a general generator of rotations that is related to the Hamiltonian that governs the unitary evolution of the state. We then show how the measurement statistics depend on the parameters of the initial state and the unitary.

The single qubit state $\hat{\rho}$ and generator of rotations under which the state evolves $\hat{G} = \frac{1}{\hbar}\int dt \hat{H}(t)$, can be written in the eigenbasis of the Pauli operator $\hat{\sigma}_z$, i.e. $\{|0\rangle, |1\rangle\}$, as follows:

$$\hat{\rho} = \begin{pmatrix} \rho_{00} & e^{-i\gamma}\rho_{01} \\ e^{i\gamma}\rho_{01} & \rho_{11} \end{pmatrix} ; \tag{1a}$$

$$\hat{G} = \frac{1}{2}\begin{pmatrix} h_z & e^{-i\phi}h_c \\ e^{i\phi}h_c & -h_z \end{pmatrix} . \tag{1b}$$

The components of the Bloch vectors associated with $\hat{\rho}$ and $\hat{G}$ are given by:

$$\vec{v}_{\hat{\rho}} = \{2\rho_{01}\cos(\gamma), 2\rho_{01}\sin(\gamma), \rho_{00}-\rho_{11}\} ; \tag{2a}$$

$$\vec{v}_{\hat{G}} = \{h_c\cos(\phi), h_c\sin(\phi), h_z\} . \tag{2b}$$

For $\hat{\rho}$ to provide a valid description of a quantum state, it must have positive eigenvalues and unit trace. Given the parametrization in Equation (1a), these constraints are equivalent to

$$|\vec{v}_{\hat{\rho}}| = \sqrt{4\rho_{01}^2 + (\rho_{00}-\rho_{11})^2} \leq \mathrm{tr}(\hat{\rho}) = \rho_{00}+\rho_{11} = 1 . \tag{3}$$

---

* nquesada@physics.utoronto.ca

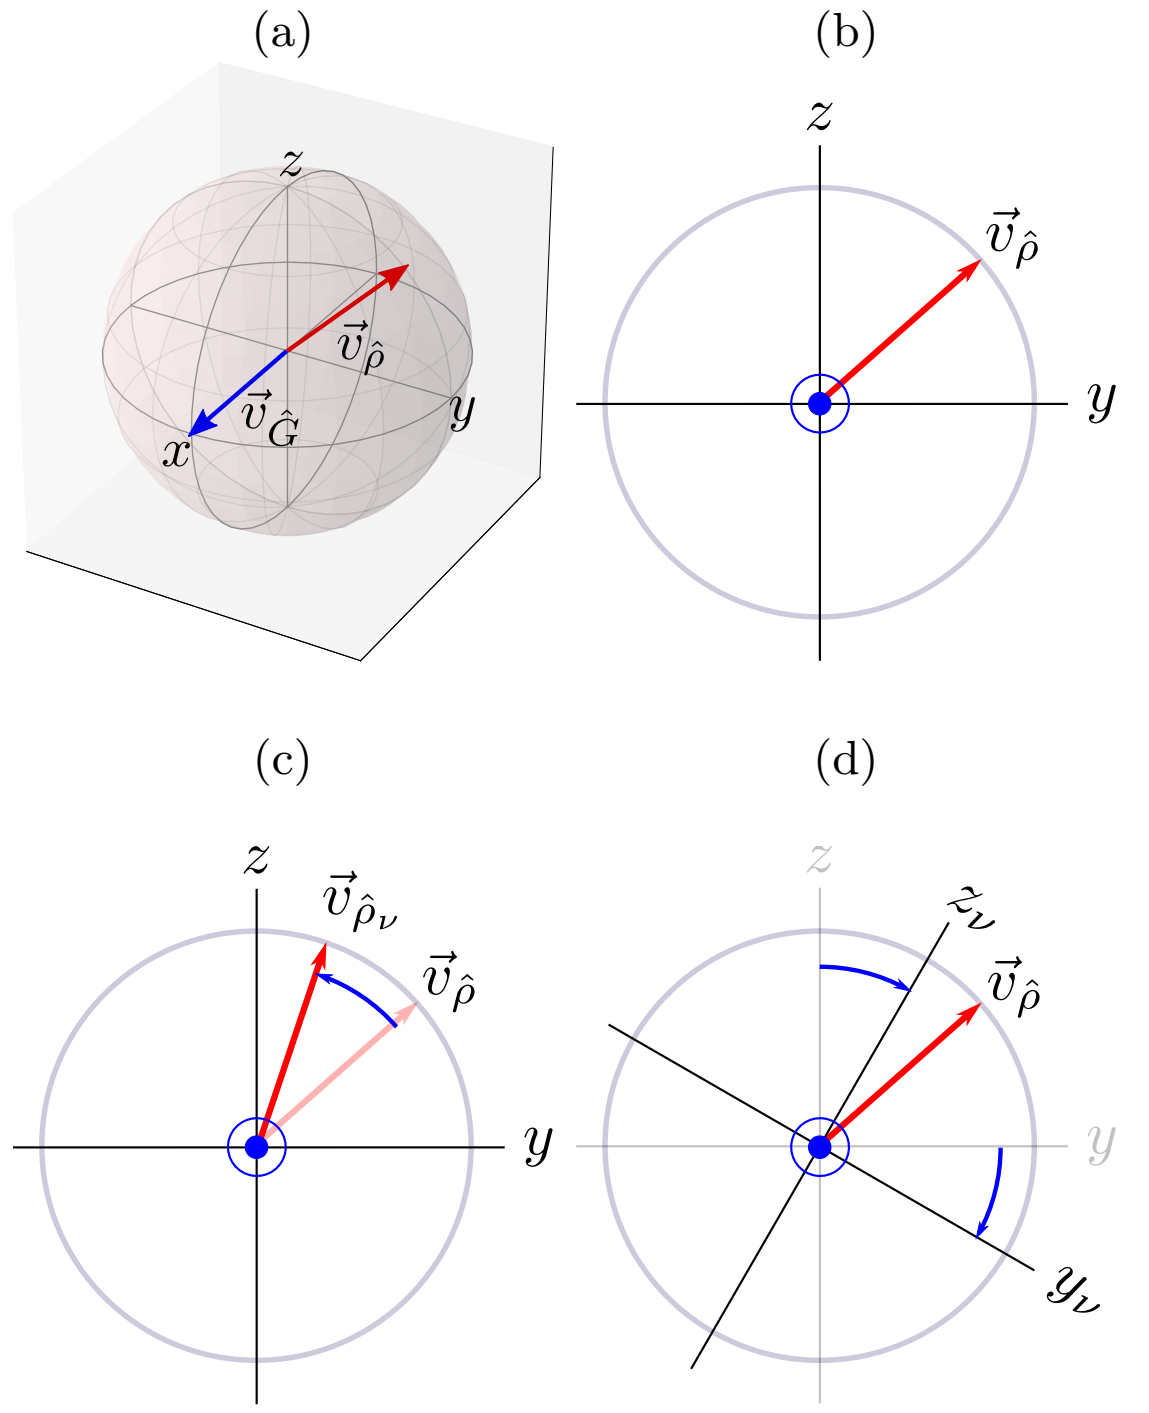

FIG. 1. The Bloch vectors $\vec{v}_{\hat{\rho}}$ and $\vec{v}_{\hat{G}}$, given in Equation (2), shown on: (a) the Bloch sphere; and (b) a cross-section of the Bloch sphere. The unitary operation $\hat{\mathcal{U}}_\nu$, shown in Equation (5), can be thought of as either: (c) rotating $\vec{v}_{\hat{\rho}}$ about $\vec{v}_{\hat{G}}$; or (d) rotating the reference frame about $\vec{v}_{\hat{G}}$ in the opposite direction.

The action of the Hamiltonian on the state will be given by

$$\hat{\rho} \longrightarrow \hat{\rho}_\nu = \hat{\mathcal{U}}_\nu \hat{\rho}_0 \hat{\mathcal{U}}_\nu^\dagger \,, \tag{4}$$

with

$$\hat{\mathcal{U}}_\nu(h_z, h_c, \phi) = \mathrm{e}^{-i\hat{G}(h_z,h_c,\phi)}. \tag{5}$$

We use the label ν to refer to a specific set of parameters $\{h_z, h_c, \phi\}$ witin the generator G.

By expanding the exponential it is easy to see that the Bloch vector of the state $\hat{\rho}$ is rotated by an angle

$$\Omega = |\vec{v}_{\hat{G}}| = \sqrt{h_c^2 + h_z^2} \tag{6}$$

around the axis specified by the Bloch vector of $\hat{G}$. This is then an active transformation of the vector. Equivalently the action of the Hamiltonian can be defined in terms of the basis elements $\{|0\rangle, |1\rangle\}$:

$$|0\rangle \longrightarrow |0_\nu\rangle = \hat{\mathcal{U}}_\nu^\dagger |0\rangle \;; \tag{7a}$$

$$|1\rangle \longrightarrow |1_\nu\rangle = \hat{\mathcal{U}}_\nu^\dagger |1\rangle \,. \tag{7b}$$

In this interpretation, the Bloch vector of the state remains fixed but the Bloch sphere itself rotates by an angle $-\Omega$ around the axis $\vec{v}_{\hat{G}}$. This is the passive transformation of the reference frame, which is equivalent to the transformation of the basis vectors and is illustrated in FIG. (1). Either way, transformation of $\hat{\rho}$ according to $\hat{\mathcal{U}}_\nu$, followed by measurement in the $\{|0\rangle, |1\rangle\}$ basis constitutes measurements given by the projectors

$$\hat{\Pi}_\nu^0 = |0_\nu\rangle\langle 0_\nu| \,; \quad \hat{\Pi}_\nu^1 = |1_\nu\rangle\langle 1_\nu| \,. \tag{8}$$

We draw attention to the fact that the superscript j in $\hat{\Pi}_\nu^j$ is a label denoting the original projector and should not be mistaken for an exponent.

The statistics associated with measuring $\hat{\Pi}_\nu^0$ are given by

$$n_\nu^0 = \mathrm{tr}\left(\hat{\rho}'\hat{\Pi}_\nu^0\right) = \sum_{i<j} f_{ij}\rho_{ij} \,, \tag{9}$$

where $\hat{\rho}' = \mathcal{N}\hat{\rho}$ and $\mathcal{N}$ is a constant that depends on the duration of data collection, detector efficiency, loss etc. In what follows we reabsorb this constant into $\hat{\rho}'$ and thus recast the condition $\mathrm{tr}(\hat{\rho}) = 1$ into $\mathrm{tr}(\hat{\rho}') = \mathcal{N}$. Once the unnomarlized density matrix $\hat{\rho}'$ is determined it suffices to divide by its trace to recover $\hat{\rho}$. The coefficients in Equation (9) are given by

$$f_{00} = c^2 + s^2\tilde{h}_z^2 \,; \tag{10a}$$

$$f_{11} = s^2\tilde{h}_c^2 \,; \tag{10b}$$

$$f_{01} = 2\left(c\sin(\beta) + s\cos(\beta)\tilde{h}_z\right)\sqrt{f_{11}} \,, \tag{10c}$$

where $\tilde{h}_i = h_i/\Omega$, $c = \cos(\Omega/2)$, $s = \sin(\Omega/2)$, and $\beta = \phi - \gamma$. Similarly, the statistics associated with measuring $\hat{\Pi}_\nu^1$ are given by

$$n_\nu^1 = \mathrm{tr}\left(\hat{\rho}'\hat{\Pi}_\nu^1\right) = \sum_{i<j} g_{ij}\rho_{ij} \,, \tag{11}$$

where

$$g_{00} = s^2\tilde{h}_c^2 \,; \tag{12a}$$

$$g_{11} = c^2 + s^2\tilde{h}_z^2 \,; \tag{12b}$$

$$g_{01} = -2\left(c\sin(\beta) + s\cos(\beta)\tilde{h}_z\right)\sqrt{g_{00}} \,. \tag{12c}$$

From the form of n_ν^0 and n_ν^1, it can be seen that just one type of measurement, either $\hat{\Pi}_\nu^0$ or $\hat{\Pi}_\nu^1$, is sufficient to access all the elements of the density matrix in Equation (1a). An appropriate set of different realizations of one of the projectors $\hat{\Pi}_\nu^j$ can be used to construct a set of equations invertible for the unknown parameters of the density matrix, thereby realizing quantum state tomography of the two-level system.

Inspection of the coefficients f_{01} and g_{01} shows that the system of equations can only be solved for β. If the phase ϕ is known, then the system is determined and a complete inversion can be performed.

We now define a set of measurement statistics $\Lambda \subseteq \{n_{\nu_1}^0, n_{\nu_2}^0 \ldots, n_{\nu_1}^1, n_{\nu_2}^1 \ldots\}$ and a set of unknown parameters $\Gamma \subseteq \{\rho_{00}, \rho_{01}, \rho_{11}, h_z, h_c, \beta\}$. Determining whether the set of equations in (9) and/or (11), parameterized by Λ, will be invertible for Γ is a standard problem of analysis [8]. This occurs when the Jacobian, i.e. the determinant of the Jacobian matrix, is non-zero,

$$J = \det\left(\frac{\partial \Lambda}{\partial \Gamma}\right) \neq 0\,. \tag{13}$$

In the remainder of this section, we discuss several scenarios, beginning with a completely characterized unitary before extending the formalism to include unknown parameters in the generator $\hat{G}$.

A. Completely characterized unitary

We first consider the familiar scenario where one has complete knowledge and control over the unitary operation. Given the ability to measure in one particular basis, one can make measurements in any arbitrary basis $\{|0_\nu\rangle, |1_\nu\rangle\}$.

As an illustrative example, we consider the four measurements introduced by White *et al.* [9] which correspond to the four measurement operators

$$\hat{\Pi}^0 = |0\rangle\langle 0|\,; \tag{14a}$$
$$\hat{\Pi}^1 = |1\rangle\langle 1|\,; \tag{14b}$$
$$\hat{\Pi}^1_\nu = \hat{\mathcal{U}}_\nu |1\rangle\langle 1| \hat{\mathcal{U}}^\dagger_\nu\,; \quad \text{for } \nu = \text{i, ii}\,, \tag{14c}$$

where the unitary operations are given by

$$\hat{\mathcal{U}}_{\text{i}} = \hat{\mathcal{U}}(0, \pi/2, 0)\,; \tag{15a}$$
$$\hat{\mathcal{U}}_{\text{ii}} = \hat{\mathcal{U}}(0, \pi/2, \pi/2)\,, \tag{15b}$$

and $\hat{\mathcal{U}}(h_z, h_c, \phi)$ is defined in Equation (5). The Jacobian for this scenario is given by

$$J_{\text{A}} = \det\left(\frac{\partial(n^0, n^1, n^1_{\text{i}}, n^1_{\text{ii}})}{\partial(\rho_{00}, \rho_{01}, \rho_{11}, \gamma)}\right) = \rho_{01}\,. \tag{16}$$

As long as $\hat{\rho}$ has non-zero coherence, we can solve for all unknown parameters $\Gamma = \{\rho_{00}, \rho_{01}, \rho_{11}, \gamma\}$. If $\rho_{01} = 0$, the phase γ will be undefined, however, the system of equations will still be invertible as in this situation γ will be absent from the expressions for n^j_ν.

B. One unknown parameter

We now consider a scenario where $\hat{G}$ contains one unknown parameter. To solve for this additional parameter, we require one additional measurement. We consider the scenario introduced by Brańczyk *et al.* [5] (with some minor adjustments), which requires $h_z = 0$, and $h_c = m_c \lambda_c$ where m_c is a controllable parameter and λ_c is unknown. We also require the ability to control ϕ. Such a physical scenario can be realized when a polarization encoded qubit passes through m_c wave-plates of unknown retardance λ_c at an orientation specified by ϕ.

Under these conditions, we construct five measurement operators:

$$\hat{\Pi}^1 = |1\rangle\langle 1|\,; \tag{17a}$$
$$\hat{\Pi}^1_\nu = \hat{\mathcal{U}}_\nu |1\rangle\langle 1| \hat{\mathcal{U}}^\dagger_\nu\,; \quad \text{for } \nu = \text{i, ii, iii, iv}\,, \tag{17b}$$

where the unitary operations are given by

$$\hat{\mathcal{U}}_{\text{i}} = \hat{\mathcal{U}}(0, \lambda_c, 0)\,; \tag{18a}$$
$$\hat{\mathcal{U}}_{\text{ii}} = \hat{\mathcal{U}}(0, 2\lambda_c, 0)\,; \tag{18b}$$
$$\hat{\mathcal{U}}_{\text{iii}} = \hat{\mathcal{U}}(0, \lambda_c, \pi/2)\,; \tag{18c}$$
$$\hat{\mathcal{U}}_{\text{iv}} = \hat{\mathcal{U}}(0, 2\lambda_c, \pi/2)\,, \tag{18d}$$

and $\hat{\mathcal{U}}(h_z, h_c, \phi)$ is defined in Equation (5).

The Jacobian for this scenario is given by

$$J_{\text{B}} = \det\left(\frac{\partial(n^1, n^1_{\text{i}}, n^1_{\text{ii}}, n^1_{\text{iii}}, n^1_{\text{iv}})}{\partial(\rho_{00}, \rho_{01}, \rho_{11}, \lambda_c, \gamma)}\right) \tag{19}$$
$$= 64\rho_{01}^2 \sin^6\left(\frac{\lambda_c}{2}\right)\cos^4\left(\frac{\lambda_c}{2}\right) \times (\sin(\gamma) - \cos(\gamma))\,. \tag{20}$$

J_{B} will be equal to zero in the following circumstances:

$$\rho_{01} = 0\,; \tag{21a}$$
$$\lambda_c = 0\,; \tag{21b}$$
$$\lambda_c = \pi/2\,; \tag{21c}$$
$$\gamma = \pi/4\,, \tag{21d}$$

and therefore the transformation will not be invertible. Let's examine each circumstance individually. The case where $\rho_{01} = 0$ was discussed in the previous section. When $\lambda_c = 0$, we never change the measurement basis and thus trivially nothing can be learnt about the state except for the value of ρ_{00}. If $\lambda_c = \pi$, then $\hat{\mathcal{U}}_{\text{ii}} = \hat{\mathcal{U}}_{\text{iv}}$, leading to redundancy in the measurement statistics thus providing insufficient information. To understand the last condition, one must look at the explicit forms of n^1_{i} and n^1_{ii}, which differ from n^1_{ii} and n^1_{iv} by $\sin(\gamma) \to \cos(\gamma)$ respectively. When $\gamma = \pi/4$, $\sin(\gamma) = \cos(\gamma)$, once again leading to redundancy in the measurement statistics.

In all other circumstances, the system will be solvable for the unknown parameters in the density matrix and the unitary.

C. Two unknown parameters

We now introduce an additional unknown parameter in the generator, such that $h_z = m_z \lambda_z$ where m_z is controllable and λ_z is unknown. We can build upon the results of the previous section, where we had implicitly set $m_z = 0$, and make an additional measurement given by the measurement operator

$$\hat{\Pi}^1_{\text{v}} = \hat{\mathcal{U}}_{\text{v}} |1\rangle\langle 1| \hat{\mathcal{U}}^\dagger_{\text{v}}\,, \tag{22}$$

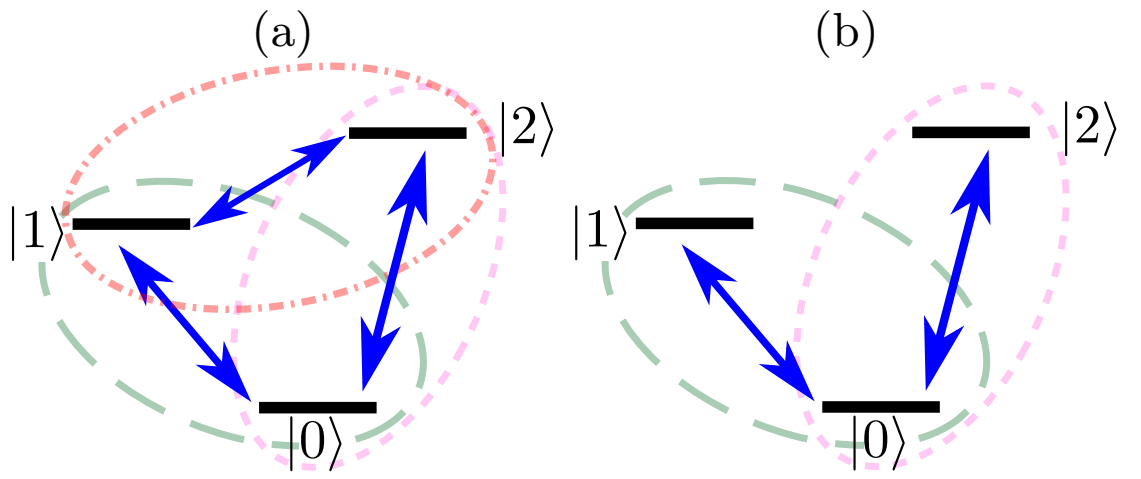

FIG. 2. Representation of two qudit systems with $d = 3$. In (a) each level can be coupled to each other level by the Hamiltonian interactions represented by the blue arrows. In (b) the two levels $|1\rangle$ and $|2\rangle$ cannot be coupled directly but can still interact to second order through the level $|0\rangle$.

where the unitary operation is given by

$$\hat{\mathcal{U}}_{\text{V}} = \hat{\mathcal{U}}(\lambda_z, 0, 0)\,. \tag{23}$$

The Jacobian for this scenario is given by

$$J_{\text{C}} = \frac{\partial n^1_{\text{V}}}{\partial \lambda_z} J_{\text{B}} = 6{\lambda_z}^2 \rho_{00} J_{\text{B}}\,, \tag{24}$$

where J_{B} is defined in Equation (20). The Jacobian adopts this simple form because J_{C} is upper block triangular where the first block is identical to J_{B} and the other block is simply given by $\partial n^1_z/\partial\lambda_z$. As long as $J_{\text{B}} \neq 0$, and $\lambda_z \neq 0$ in the sixth measurement, the system will be solvable for the unknown parameters in the density matrix and the unitary.

III. GENERALIZATION TO MULTI-DIMENSIONAL SYSTEMS

The generalization to multi-dimensional systems follows readily. One applies the same procedure: 1) write down the unitary being applied to the state, making note of parameters that are unknown as well as parameters that are controllable; 2) construct a set of measurement operators analogous to those in Equations (17) using different realizations of the unitary, achieved with different settings of the controllable parameters; 3) check that the measurement operators are suitable by calculating the Jacobian in Equation (13); 4) collect measurement statistics from measurements given by the measurement operators in step 2; 5) solve for the unknown parameters using one of a variety of methods, including simple linear inversion, least-squares estimation or the popular maximum likelihood estimation method [10], or alternatively, one of a growing number of new techniques [11–18].

The above procedure may be simplified if the multi-dimensional system supports interaction Hamiltonians that generate all combinations of pair-wise coupling between the eigenstates, as illustrated for a three-level atomic system in FIG. 2(a). In this situation, each measurement operator can be constructed from a two-dimensional unitary operation, and the SCT procedure can be broken down into performing a succession of two-qubit SCT on all possible pairs of levels in the system, denoted by ovals in FIG. 2(a).

On the other hand it might happen that there are eigenstates that are not directly coupled, but are coupled to another common state. This is the case illustrated in FIG. 2(b). In this scenario, pairwise qubit tomography will not be sufficient. Nevertheless it is still possible to gain complete information about the state and, in particular, the value of the coherences between the levels that are not directly coupled, by employing ancillary levels such as the $|0\rangle$ state in FIG. 2(b). This will be demonstrated in the next section, for a three-level atomic system in the V configuration.

We note that the general idea of how to perform quantum state topography of d-level systems have been studied by Thew *et al.* [19].

IV. EXAMPLE: V-TYPE THREE-LEVEL SYSTEM

In this section we provide an example of how to extend SCT to the case of a three-level system in which two of the levels are not directly coupled by the Hamiltonian that is used to perform changes in the measurement basis; FIG 2 (b). We consider a concrete physical system, nevertheless the conclusions reached in the following subsections will be independent of the implementations that we outline here.

A. Description of the system

We consider an atomic or molecular three-level system with a non-degenerate V-type energy ladder with excited states $|1\rangle$ and $|2\rangle$ and ground state $|0\rangle$. The matter Hamiltonian is given by:

$$\hat{H}_0 = \hbar\omega_1 |1\rangle\langle 1| + \hbar\omega_2 |2\rangle\langle 2|\,, \tag{25}$$

where the energy of the ground state $|0\rangle$ has been set to zero. The system will couple to the electromagnetic field via the transition dipole moment operator $\hat{d}$, where

$$\vec{d}_{11} = \vec{d}_{22} = \vec{d}_{12} = \vec{d}_{21} = 0\,; \tag{26a}$$

$$\vec{d}_{01} = \vec{d}^{*}_{10} \neq 0\,; \tag{26b}$$

$$\vec{d}_{02} = \vec{d}^{*}_{20} \neq 0\,. \tag{26c}$$

The light-matter interaction will be given in the dipole approximation by

$$\hat{H}_{\text{lm}}(t) = \hat{d}\cdot\vec{E}(t)\,, \tag{27}$$

where $\vec{E}(t) = \vec{E}^{+}(t) + \vec{E}^{-}(t)$ is the electric field. In particular, it is assumed that the field is in a superposition of two continuous-wave lasers that are each resonant with the $|0\rangle \to |1\rangle$ and $|0\rangle \to |2\rangle$ transitions:

$$\vec{E}^{+}(t) = E_1 e^{i\theta_1} e^{-i\omega_1 t}\vec{u}_1 + E_2 e^{i\theta_2} e^{-i\omega_2 t}\vec{u}_2\,, \tag{28}$$

where E_i and θ_i are the controllable amplitudes and phases of the fields respectively, $\vec{u}_i$ are their polarizations, and ω_i their frequencies. Without loss of generality, we take E_i to be real. In the "bare" basis of the V-type system, the light-matter interaction Hamiltonian is

$$\begin{aligned} \hat{H}_{\text{lm}}(t) &= \vec{d}\cdot\vec{E}(t) && (29)\\ &= \Big(\vec{d}_{10}\,|1\rangle\langle 0| + \vec{d}_{20}\,|2\rangle\langle 0| + \text{h.c.}\Big)\cdot\vec{E}(t). && (30)\end{aligned}$$

Making the rotating wave approximation and going into the interaction picture with respect to the Hamiltonian $\hat{H}_0$, the interaction Hamiltonian is given by

$$\begin{aligned} \hat{H}_{\text{I}}(t) =& \Big(E_1 e^{i\theta_1}\vec{d}_{10}\cdot\vec{u}_1 + E_2 e^{i\theta_2}e^{i\Delta_{21}t}\vec{d}_{10}\cdot\vec{u}_2\Big)\,|1\rangle\langle 0|\\ &+\Big(E_1 e^{i\theta_1}e^{i\Delta_{1,2}t}\vec{d}_{20}\cdot\vec{u}_1 + E_2 e^{i\theta_2}\vec{d}_{20}\cdot\vec{u}_2\Big)\,|2\rangle\langle 0|\\ &+\text{h.c.} && (31)\end{aligned}$$

where $\Delta_{ij} = \omega_i - \omega_j$. We now calculate the generator of rotations by assuming that the field is turned on at time $-t/2$ and turned off at time $t/2$:

$$\begin{aligned} \hat{G} &= \frac{1}{\hbar}\int_{-t/2}^{t/2} dt'\hat{H}_{\text{I}}(t') && (32)\\ &= E_1 t e^{i\theta_1}\vec{d}_{10}\cdot\vec{u}_1\,|1\rangle\langle 0| + E_2 t e^{i\theta_2}\vec{d}_{20}\cdot\vec{u}_2\,|2\rangle\langle 0|\\ &\quad+\text{h.c.} && (33)\end{aligned}$$

where we also assumed that $t \gg \Delta_{12}^{-1}$ such that $\int_{-t/2}^{t/2} e^{i\Delta_{12}t} = 2t\,\text{sinc}(\Delta_{12}t/2) \approx 0$. We can write the generator as

$$\hat{G} = \frac{h_1}{2}\mathrm{e}^{i\phi_1}\,|1\rangle\langle 0| + \frac{h_2}{2}\mathrm{e}^{i\phi_2}\,|2\rangle\langle 0| + \text{h.c.} \qquad (34)$$

where

$$\begin{aligned} h_j &= 2E_j t|\vec{d}_{j0}\cdot\vec{u}_j|\,; && (35\text{a})\\ \phi_j &= \theta_j + \arg(\vec{d}_{j0}\cdot\vec{u}_j)\,. && (35\text{b})\end{aligned}$$

Equation (34) can also be written in the ordered basis $\{|0\rangle, |1\rangle, |2\rangle\}$ as

$$G = \frac{1}{2}\begin{pmatrix} 0 & e^{-i\phi_1}h_1 & e^{-i\phi_2}h_2\\ e^{i\phi_1}h_1 & 0 & 0\\ e^{i\phi_2}h_2 & 0 & 0\end{pmatrix}. \qquad (36)$$

The matrix above has both zero trace and zero determinant, and therefore the eigenvalues take the very simple form $\text{spec}(\hat{G}) = \{-\sqrt{h_1^2+h_2^2}/2, 0, \sqrt{h_1^2+h_2^2}/2\}$. Another elegant way of writing the above matrix is in terms of the Gell-Mann matrices [20]:

$$\begin{aligned} \hat{G} = \frac{1}{2}\Big(&\cos(\phi_1)h_1\hat{\lambda}_1 + \sin(\phi_1)h_1\hat{\lambda}_2\\ &+\cos(\phi_2)h_2\hat{\lambda}_4 + \sin(\phi_2)h_2\hat{\lambda}_5\Big)\,. && (37)\end{aligned}$$

B. Measurement statistics

We now calculate the measurement statistics associated with projection onto the two excited states of the system.

A simple way of parametrizing the density matrix of a 3 level system is as follows:

$$\hat{\rho} = \begin{pmatrix} \rho_{00} & \rho_{01}e^{-i\gamma_{01}} & \rho_{02}e^{-i\gamma_{02}}\\ \rho_{01}e^{i\gamma_{01}} & \rho_{11} & \rho_{12}e^{-i\gamma_{12}}\\ \rho_{02}e^{i\gamma_{02}} & \rho_{12}e^{i\gamma_{12}} & \rho_{22}\end{pmatrix}. \qquad (38)$$

Note that unlike the qubit case, the constraints that the set of numbers ρ_{ij} will have to satisfy so that $\hat{\rho}$ is a non-negative linear operator are by no means trivial [21, 22].

To perform state tomography on the unknown state $\hat{\rho}$, we evolve it according to $\hat{\mathcal{U}}_\nu = \exp(-i\hat{G})$, where we assume that the interaction time is short compared with the rate of spontaneous emission. After the evolution is complete, the detection of a spontanously-emitted photon of frequency ω_1 or ω_2 constitutes a projective measurement of $\hat{\rho}$ given by the projectors

$$\hat{\Pi}_\nu^1 = |1_\nu\rangle\langle 1_\nu|\,;\quad \hat{\Pi}_\nu^2 = |2_\nu\rangle\langle 2_\nu|\,, \qquad (39)$$

where $|j_\nu\rangle = \hat{\mathcal{U}}_\nu\,|j\rangle$. The statistics associated with measuring $\hat{\Pi}_\nu^1$ are given by

$$n_\nu^1 = \text{tr}\left(\hat{\rho}'\hat{\Pi}_\nu^1\right) = \sum_{i\le j}^{2} f_{ij}\rho_{ij}\,, \qquad (40)$$

where $\hat{\rho}' = \mathcal{N}\hat{\rho}$ and the coefficients are given by

$$\begin{aligned} f_{00} &= \tilde{h}_1^2 s^2\,; && (41\text{a})\\ f_{11} &= \left(\tilde{h}_1^2 c + \tilde{h}_2^2\right)^2\,; && (41\text{b})\\ f_{22} &= \tilde{h}_1^2\tilde{h}_2^2(c-1)^2\,; && (41\text{c})\\ f_{01} &= 2\sin(\beta_{01})\sqrt{f_{00}f_{11}}\,; && (41\text{d})\\ f_{02} &= 2\sin(\beta_{02})\sqrt{f_{00}f_{22}}\,; && (41\text{e})\\ f_{12} &= 2\cos(\beta_{12})\sqrt{f_{11}f_{22}}\,, && (41\text{f})\end{aligned}$$

where

$$\begin{aligned} \tilde{h}_j &= h_j/\Omega\,; && (42\text{a})\\ c &= \cos(\Omega/2) && (42\text{b})\\ s &= \sin(\Omega/2) && (42\text{c})\\ \Omega &= \sqrt{h_1^2+h_2^2} && (42\text{d})\\ \beta_{0j} &= \phi_j - \gamma_{0,j}\,; && (42\text{e})\\ \beta_{12} &= \gamma_{1,2} + \phi_1 - \phi_2\,. && (42\text{f})\end{aligned}$$

Similarly, the statistics associated with measuring $\hat{\Pi}_\nu^2$ are given by

$$n_\nu^2 = \text{tr}\left(\hat{\rho}'\hat{\Pi}_\nu^2\right) = \sum_{i\le j}^{2} g_{ij}\rho_{ij}\,, \qquad (43)$$

where

$$g_{00} = \tilde{h}_2^2 s^2\,; \tag{44a}$$
$$g_{11} = \tilde{h}_1^2 \tilde{h}_2^2 (c-1)^2\,; \tag{44b}$$
$$g_{22} = \left(\tilde{h}_1^2 + \tilde{h}_2^2 c\right)^2\,; \tag{44c}$$
$$g_{01} = 2\sin\left(\beta_{01}\right)\sqrt{g_{00}g_{11}}\,; \tag{44d}$$
$$g_{02} = 2\sin\left(\beta_{02}\right)\sqrt{g_{00}g_{22}}\,; \tag{44e}$$
$$g_{12} = 2\cos\left(\beta_{12}\right)\sqrt{g_{11}g_{22}}\,. \tag{44f}$$

From the form of n_ν^1 and n_ν^2, it can be seen that just one type of measurement, either $\hat{\Pi}_\nu^1$ or $\hat{\Pi}_\nu^2$, is sufficient to access all the elements of the density matrix in Equation (38). Different realizations of one of the projectors $\hat{\Pi}_\nu^j$ can be used to construct a set of equations invertible for the unknown parameters of the density matrix, thereby realizing quantum state tomography of the three-level system.

We note that, as in the qubit case, the equations are only invertible for β_{ij}, but not for the individual quantities γ_{ij} and ϕ_k. If the phases ϕ_1 and ϕ_2 are known then the system is determined and a complete inversion can be performed.

Physically, both fields which couple $|1\rangle$ and $|2\rangle$ to the ground state must be present simultaneously in order to access all elements of the density matrix. This is to be expected since the only way to have a coherent interaction between the two excited states in a V-type system is by going through the ground state—possible only when both fields are present. This can also be seen from the equations above, since f_{12} and g_{12} are dependent on $f_{11}f_{22}$ and $g_{11}g_{22}$ respectively.

On a more abstract level, it is not possible to generate the whole set of Gell-Mann matrices from the sets $\{\hat{\lambda}_1, \hat{\lambda}_2\}$ or $\{\hat{\lambda}_4, \hat{\lambda}_5\}$, however the entire set can be obtained by multiplying pairs from the set $\{\hat{\lambda}_1, \hat{\lambda}_2, \hat{\lambda}_4, \hat{\lambda}_5\}$, which is precisely the set contained in the expression for $\hat{G}$ in Equation (37).

C. Unknown transition dipole moments

In this section, we demonstrate how self-calibrating tomography can be performed on a V-type three-level system with unknown transition dipole moments $\vec{d}_{j0}$. Without loss of generality, we assume that the transition dipole moments are real and positive. We can therefore parameterize the generator in Equation (34) as follows:

$$h_j = m_j \lambda_j\,; \tag{45a}$$
$$\phi_j = \theta_j\,, \tag{45b}$$

where $m_j = 2E_j t$ is a controllable parameter proportional to the square of the intensity of the fields, $\lambda_j = |\vec{d}_{j0}\cdot\vec{u}_j|$ is unknown and θ_j is the controllable phase of each field.

To demonstrate the process of constructing the appropriate measurement operators, we break the problem up into three parts. The first part consists of treating one ground-excited state pair as a two-level system; this gives 5 measurement operators analogous to the qubit case discussed above. The second part consists of doing the same for the other ground-excited state pair; this gives four additional measurement operators since the ground state population parameter is already obtained from the first part. The third part consists of cleverly picking two more operators to solve for the coherences between the two excited states.

The first set of measurement operators are given by

$$\hat{\Pi}^1 = |1\rangle\langle 1|\,; \tag{46a}$$
$$\hat{\Pi}_\nu^1 = \hat{\mathcal{U}}_\nu |1\rangle\langle 1| \hat{\mathcal{U}}_\nu^\dagger\,; \quad \text{for } \nu = \text{i, ii, iii, iv}\,, \tag{46b}$$

where the unitary operations are given by

$$\hat{\mathcal{U}}_{\text{i}} = \hat{\mathcal{U}}(\lambda_1, 0, 0, 0)\,; \tag{47a}$$
$$\hat{\mathcal{U}}_{\text{ii}} = \hat{\mathcal{U}}(\lambda_1, 0, 0, \pi/2)\,; \tag{47b}$$
$$\hat{\mathcal{U}}_{\text{iii}} = \hat{\mathcal{U}}(2\lambda_1, 0, 0, 0)\,; \tag{47c}$$
$$\hat{\mathcal{U}}_{\text{iv}} = \hat{\mathcal{U}}(2\lambda_1, 0, 0, \pi/2)\,, \tag{47d}$$

where

$$\hat{\mathcal{U}}(h_1, h_2, \phi_1, \phi_2) = \mathrm{e}^{-i\hat{G}(h_1, h_2, \phi_1, \phi_2)}\,, \tag{48}$$

and $G(h_1, h_2, \phi_1, \phi_2)$ is defined in Equation (34). The second set of measurements is given by

$$\hat{\Pi}_\nu^2 = \hat{\mathcal{U}}_\nu |2\rangle\langle 2| \hat{\mathcal{U}}_\nu^\dagger\,; \quad \text{for } \nu = \text{v, vi, vii, viii}\,, \tag{49}$$

where

$$\hat{\mathcal{U}}_{\text{v}} = \hat{\mathcal{U}}(0, \lambda_2, 0, 0)\,; \tag{50a}$$
$$\hat{\mathcal{U}}_{\text{vi}} = \hat{\mathcal{U}}(0, \lambda_2, 0, \pi/2)\,; \tag{50b}$$
$$\hat{\mathcal{U}}_{\text{vii}} = \hat{\mathcal{U}}(0, 2\lambda_2, 0, 0)\,; \tag{50c}$$
$$\hat{\mathcal{U}}_{\text{viii}} = \hat{\mathcal{U}}(0, 2\lambda_2, 0, \pi/2)\,. \tag{50d}$$

The third set will need to provide information about the coherences between the two excited states. For this, we require both fields to be present simultaneously.

$$\hat{\Pi}_\nu^1 = \hat{\mathcal{U}}_\nu |1\rangle\langle 1| \hat{\mathcal{U}}_\nu^\dagger\,; \quad \text{for } \nu = \text{ix, x}\,, \tag{51}$$

where

$$\hat{\mathcal{U}}_{\text{ix}} = \hat{\mathcal{U}}(\lambda_1, \lambda_2, 0, 0)\,; \tag{52a}$$
$$\hat{\mathcal{U}}_{\text{x}} = \hat{\mathcal{U}}(\lambda_1, \lambda_2, 0, 0 + \pi/2)\,. \tag{52b}$$

To verify that the measurement statistics $n_\nu^j = \mathrm{tr}(\hat{\Pi}_\nu^j \hat{\rho})$, given by the above operators, generate a set of equations invertible for the unknown parameters, we calculate the Jacobian defined in Equation (13). We note that the three sets of inversions are independent of each other. Therefore, as long as one can retrieve: $\{\rho_{00}, \rho_{11}, \rho_{01}, \lambda_1, \gamma_1\}$ from the first set of measurements

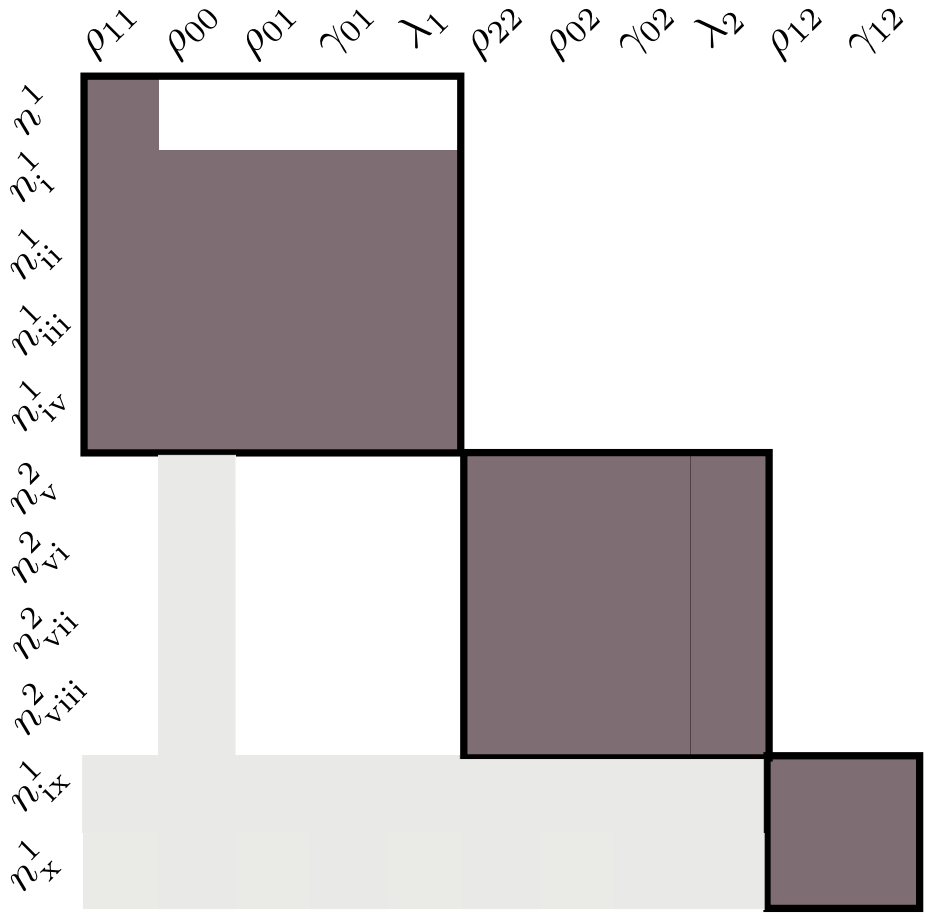

FIG. 3. Structure of the Jacobian matrix for the V-type three-level system. White squares indicate a null element of the matrix. Black lines denote the three blocks associated with J_1, J_2 and J_3. Gray non-zero elements outside the black boundaries signify that each block can only be solved if the blocks before it have already been solved.

in Equations (46); $\{\rho_{22}, \rho_{02}, \lambda_2, \gamma_2\}$ from the second set in Equations (49); and $\{\rho_{12}, \gamma_{12}\}$ from the third set in Equations (51) the inversion is possible.

Equivalently, one can compute the Jacobian matrix and notice that it is upper block triangular where the first 5×5 block corresponds to (46), the second 4×4 block corresponds to (49), and the final 2×2 block corresponds to (51). This is demonstrated schematically in FIG. 3. Explicitly the Jacobians for the blocks are:

$$J_1 = 64 \sin^6\left(\frac{\lambda_1}{2}\right) \cos^4\left(\frac{\lambda_1}{2}\right) \rho_{01}^2 \times \left(\sin\left(\gamma_{01}\right) - \cos\left(\gamma_{01}\right)\right) \; ; \tag{53a}$$

$$J_2 = 2 \sin^4(\lambda_2) \cos(\lambda_2) \rho_{02}^2 \left(\cos\left(\gamma_{02}\right) - \sin\left(\gamma_{02}\right)\right) \; ; \tag{53b}$$

$$J_3 = -\frac{16 \lambda_1^2 \lambda_2^2 \sin^4\left(\frac{\Omega}{4}\right) \rho_{12} \left(\lambda_1^2 + \lambda_2^2 \cos\left(\frac{\Omega}{2}\right)\right)^2}{\Omega^8} \, . \tag{53c}$$

Given the block structure of the matrix, the Jacobian of the whole transformation is simply

$$J = J_1 J_2 J_3 \, . \tag{54}$$

The analysis of the singularities of the quantities above (i.e. when $J_i = 0$) is completely analogous to that for the qubit case. In fact, $J_1 = J_B$ in Equation (20) if $\gamma_{01} \rightarrow \gamma$ and $\lambda_1 \rightarrow \lambda_c$. We note that in all cases, the Jacobians are proportional to the coherences simply because the phases $\gamma_{i,j}$ are undefined if the coherences $\rho_{i,j} = 0$.

We also note that the measurement operators presented here are by no means unique. Other unitaries, such as those that always contain both fields, may be preferable from an experimental perspective. The advantage of the above choice of operators is two-fold. Firstly, it demonstrates that the task of constructing measurement operators for larger-dimensional systems can largely be broken up into the less daunting task of performing SCT on two-level systems. Secondly, it allows for a more efficient computation of the Jacobian to test the choice of operators.

This analysis can be extended to systems with more complex coupling structures. One can use perturbation theory to show that if two levels are coupled by d ancillary levels, an expansion to order $d+1$ of the propagator will be able to extract the coherence between those levels. For the case of $d = 1$ this reduces to the qutrit case discussed here.

V. SUMMARY AND CONCLUDING REMARKS

We presented a general formalism for performing self-calibrating quantum state tomography of multi-dimensional systems. This technique is applicable in situations where the unitary operations used to change the measurement basis are not completely characterized.

We introduced a condition, based on the Jacobian matrix relating the measurement statistics and the unknown parameters in both the state and process, to ensure that the choice of measurement operators will lead to a set of invertible equations.

We then showed how this technique can be used to perform quantum state tomography of a V-type three-level system with unknown transition dipole moments. In doing so, we demonstrated that the task of selecting appropriate measurement operators for multi-dimensional systems can be broken down into the less daunting task of choosing measurement operators for qubit SCT.

VI. ACKNOWLEDGEMENTS

This work was funded by the DARPA (QuBE) program and NSERC.

---

[1] M. A. Nielsen and I. L. Chuang, *Quantum computation and quantum information* (Cambridge University Press, Cambridge, 2000)
[2] K. Vogel and H. Risken, Phys. Rev. A **40**, 2847 (1989)
[3] U. Leonhardt, Phys. Rev. Lett. **74**, 4101 (1995)
[4] D. F. V. James, P. G. Kwiat, W. J. Munro, and A. G. White, Phys. Rev. A **64**, 052312 (2001)
[5] A. M. Brańczyk, D. H. Mahler, L. A. Rozema, A. Darabi, A. M. Steinberg, and D. F. V. James, New J. Phys. **14**, 085003 (2012)

[6] D. Mogilevtsev, J. Řeháček, and Z. Hradil, New J. Phys. **14**, 095001 (2012)

[7] S. T. Merkel, J. M. Gambetta, J. A. Smolin, S. Poletto, A. D. Córcoles, B. R. Johnson, and M. S. Colm A. Ryan, arXiv:1211.0322 [quant-ph](2012)

[8] C. G. J. Jacobi, *Ueber die Functionaldeterminanten* (W. Engelmann, Leipzig, 1896)

[9] A. G. White, D. F. V. James, P. H. Eberhard, and P. G. Kwiat, Phys. Rev. Lett. **83**, 3103 (1999)

[10] Z. Hradil, Phys. Rev. A **55**, R1561 (1997)

[11] M. S. Kaznady and D. F. V. James, Phys. Rev. A **79**, 022109 (2009)

[12] R. Blume-Kohout, New J. Phys. **12**, 043034 (2010)

[13] D. Gross, Y.-K. Liu, S. T. Flammia, S. Becker, and J. Eisert, Phys. Rev. Lett. **105**, 150401 (2010)

[14] Y. S. Teo, H. Zhu, B.-G. Englert, J. Řeháček, and Z. c. v. Hradil, Phys. Rev. Lett. **107**, 020404 (2011)

[15] R. Blume-Kohout, Phys. Rev. Lett. **105**, 200504 (2010)

[16] H. K. Ng and B.-G. Englert, arXiv:1202.5136 [quant-ph](2012)

[17] M. Christandl and R. Renner, arXiv:1108.5329v1 [quant-ph](2011)

[18] R. Blume-Kohout, arXiv:1202.5270v1 [quant-ph](2012)

[19] R. T. Thew, K. Nemoto, A. G. White, and W. J. Munro, Phys. Rev. A **66**, 012303 (2002)

[20] M. Gell-Mann, Phys. Rev. **125**, 1067 (1962)

[21] M. S. Byrd and N. Khaneja, Phys. Rev. A **68**, 062322 (2003)

[22] S. Kryszewski and M. Zachciał, J. Phys. A: Math. Gen. **39**, 5921 (2006)